



1/24

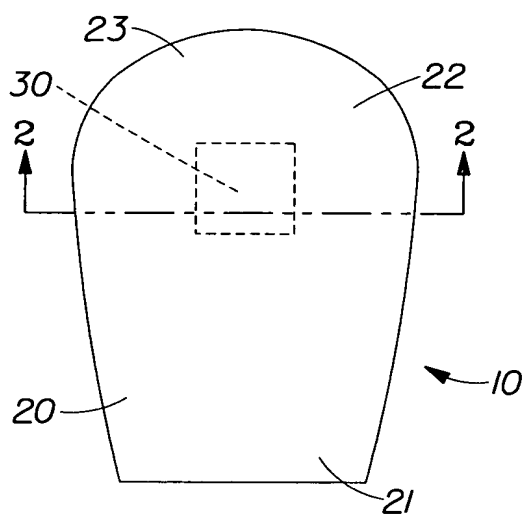


Fig. 1

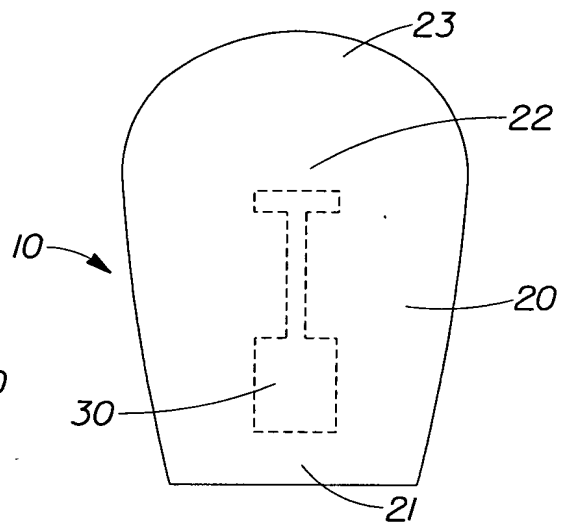


Fig. 3

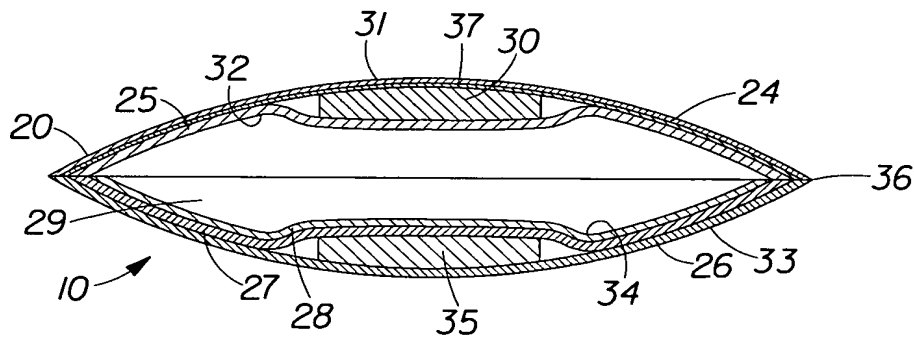


Fig. 2

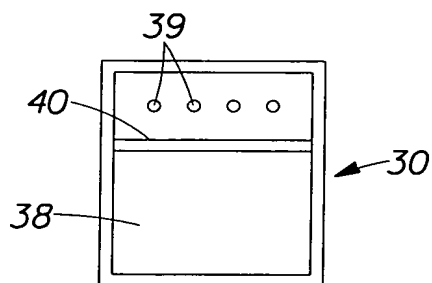


Fig. 4

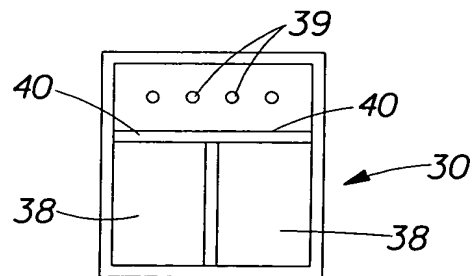


Fig. 5



2/24

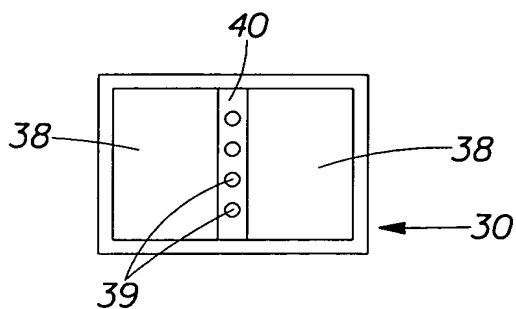


Fig. 6

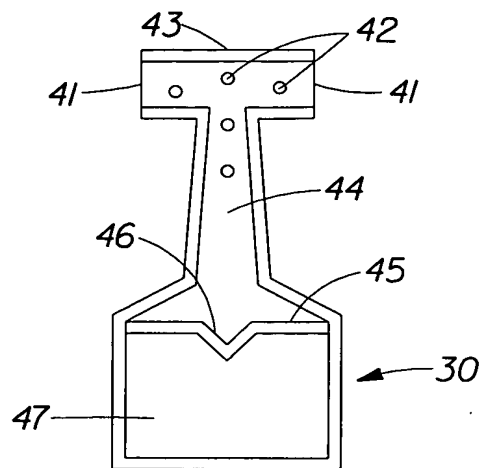


Fig. 7

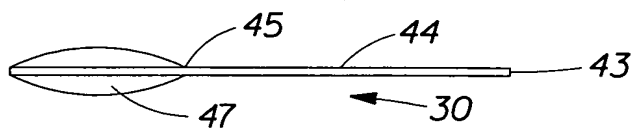


Fig. 8

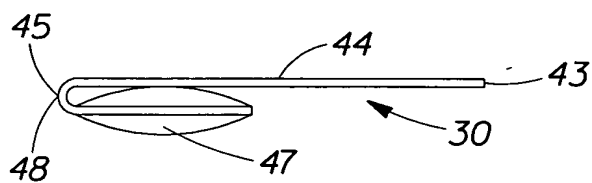


Fig. 9

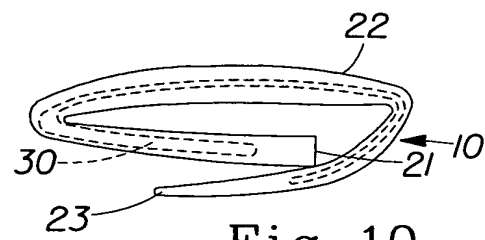


Fig. 10


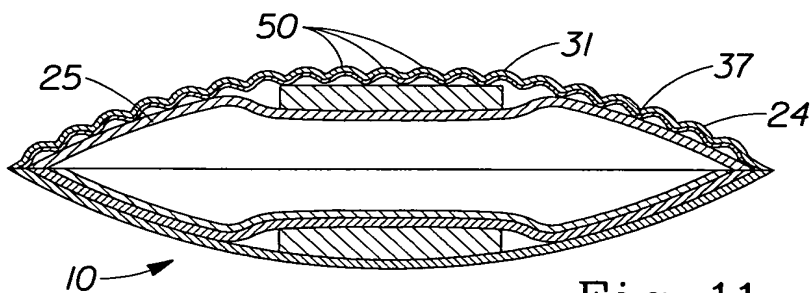




Fig. 11

Fig. 12



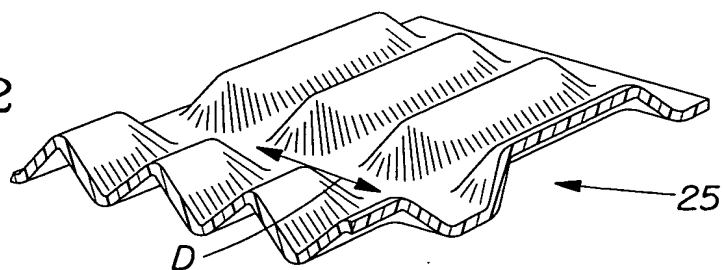

3/24

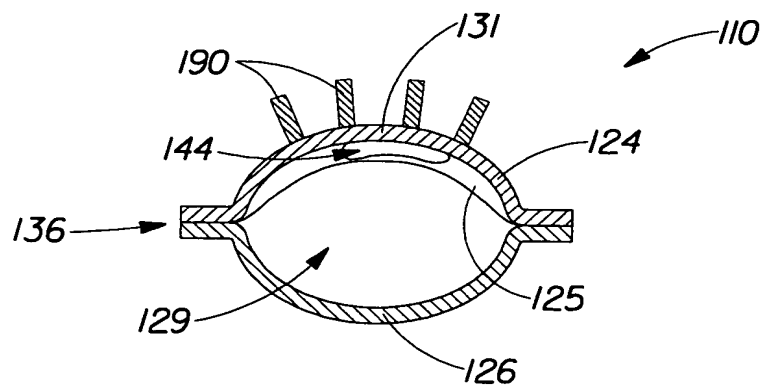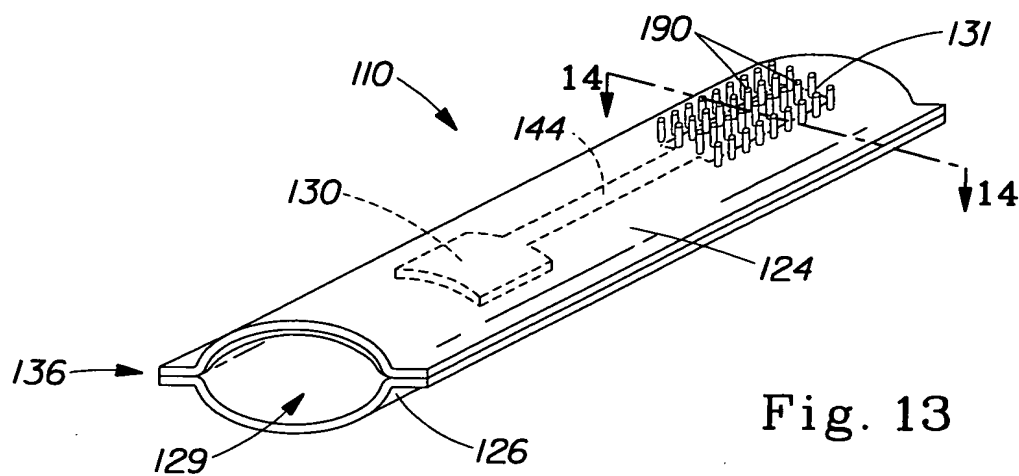



4/24

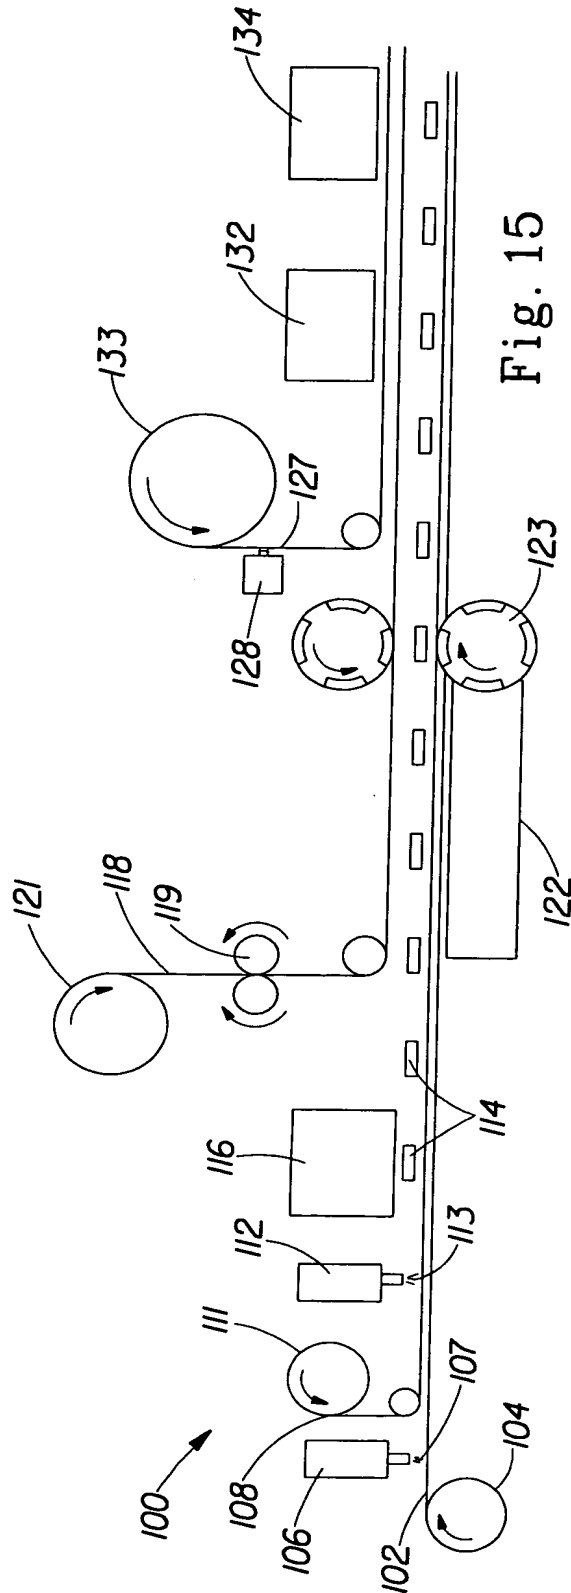


Fig. 15

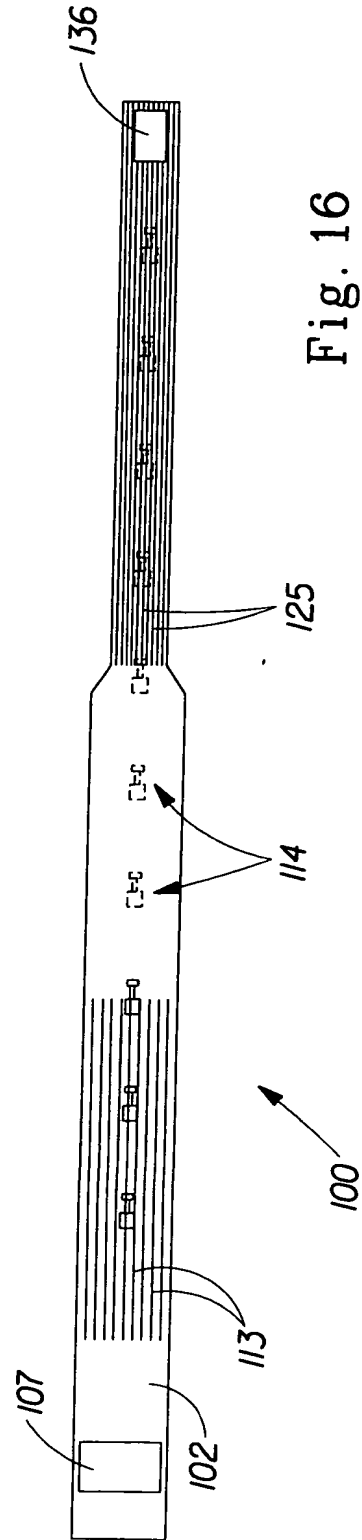


Fig. 16



5/24

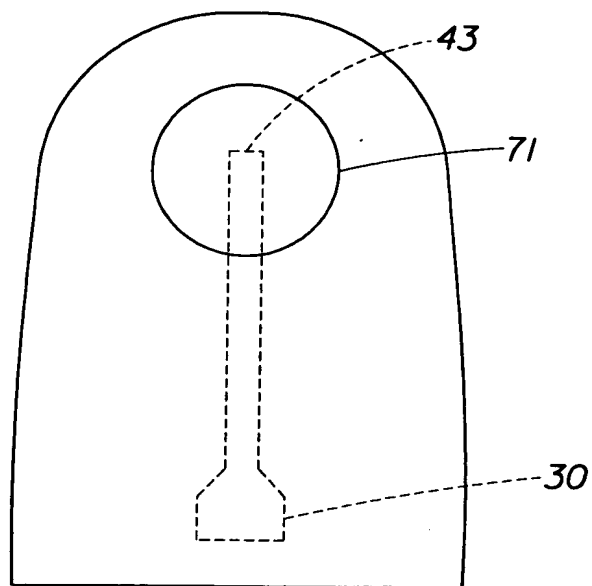


Fig. 17

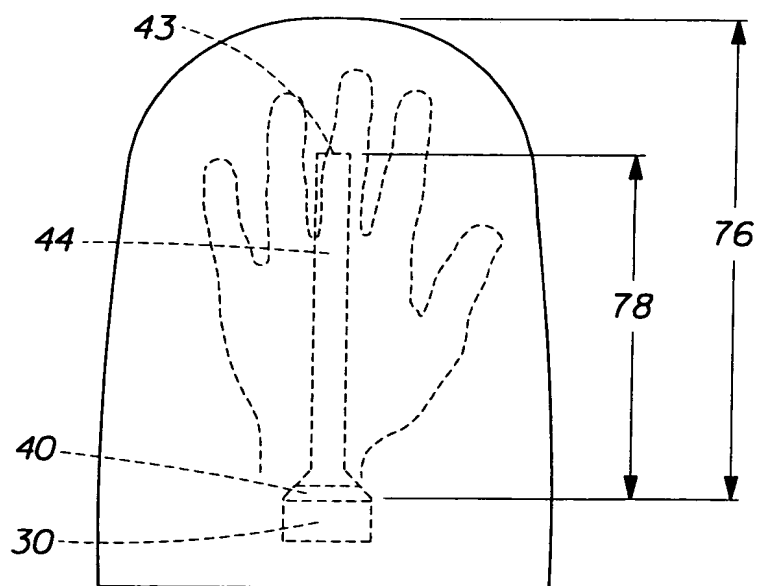


Fig. 18



6/24

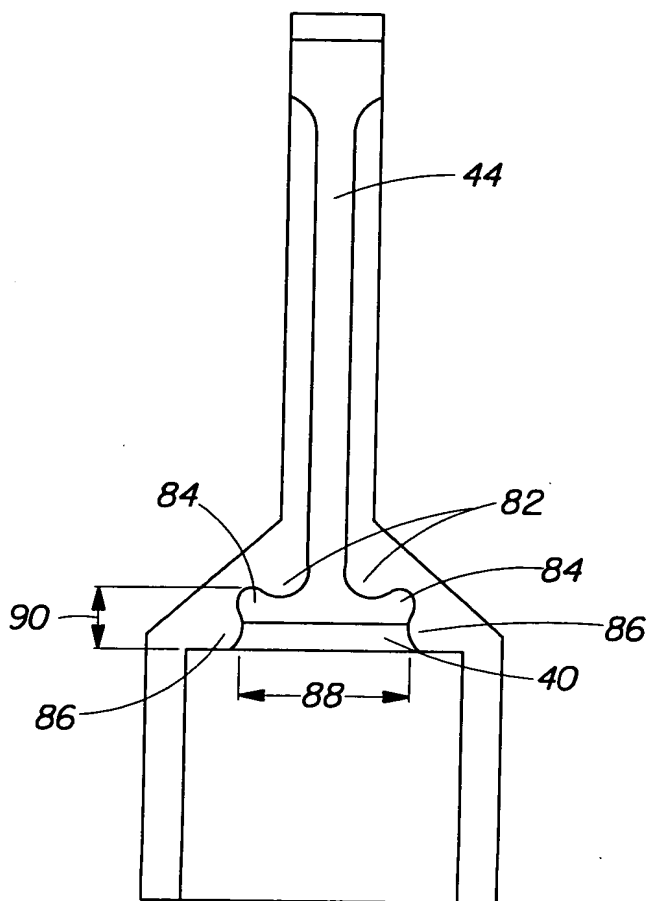


Fig. 19



7/24

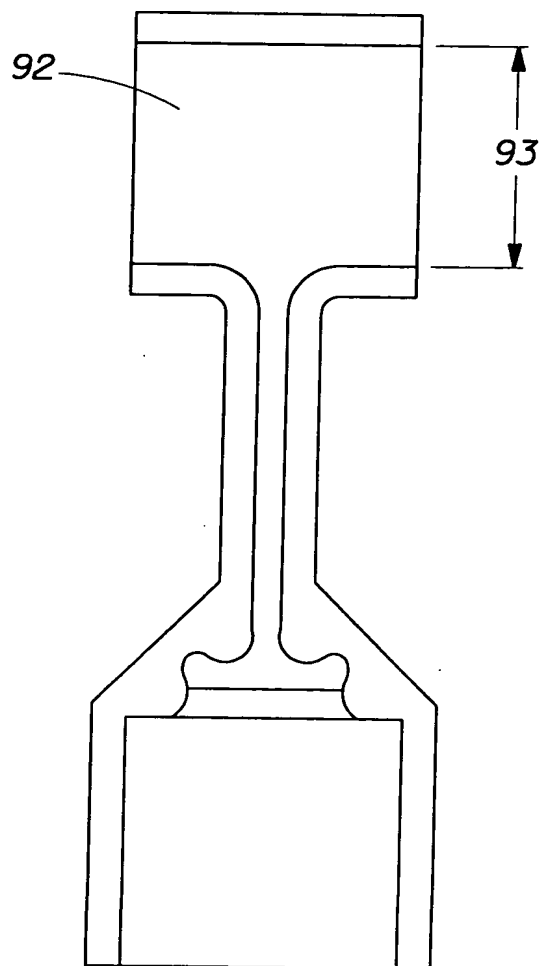


Fig. 20



8/24

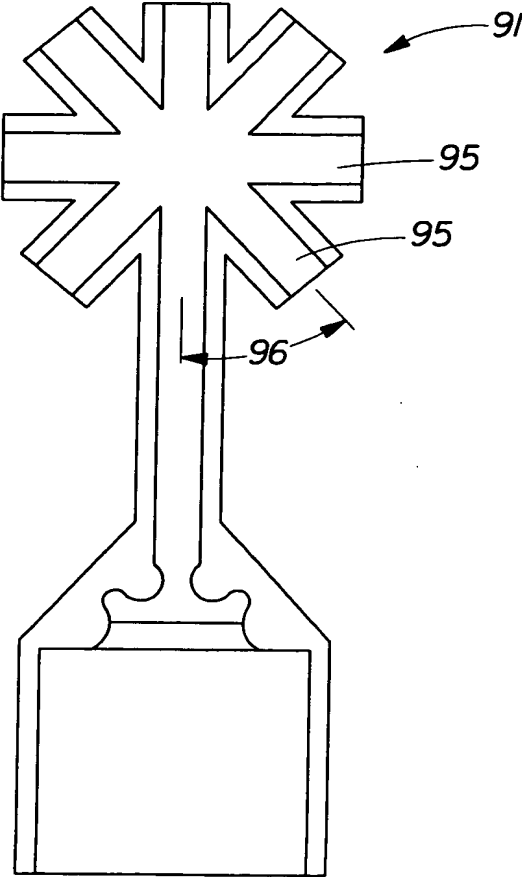


Fig. 21



9/24

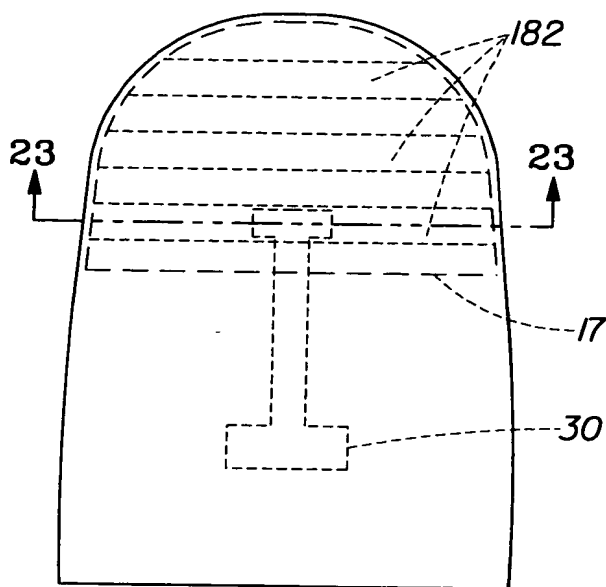


Fig. 22

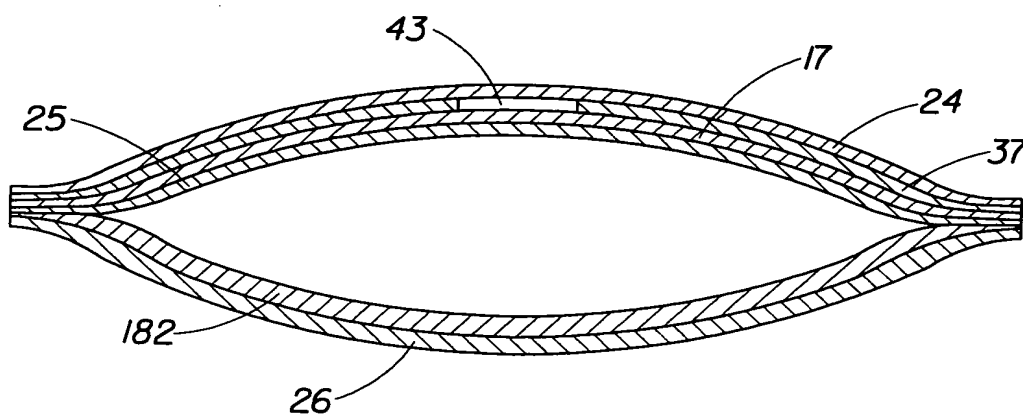


Fig. 23



10/24

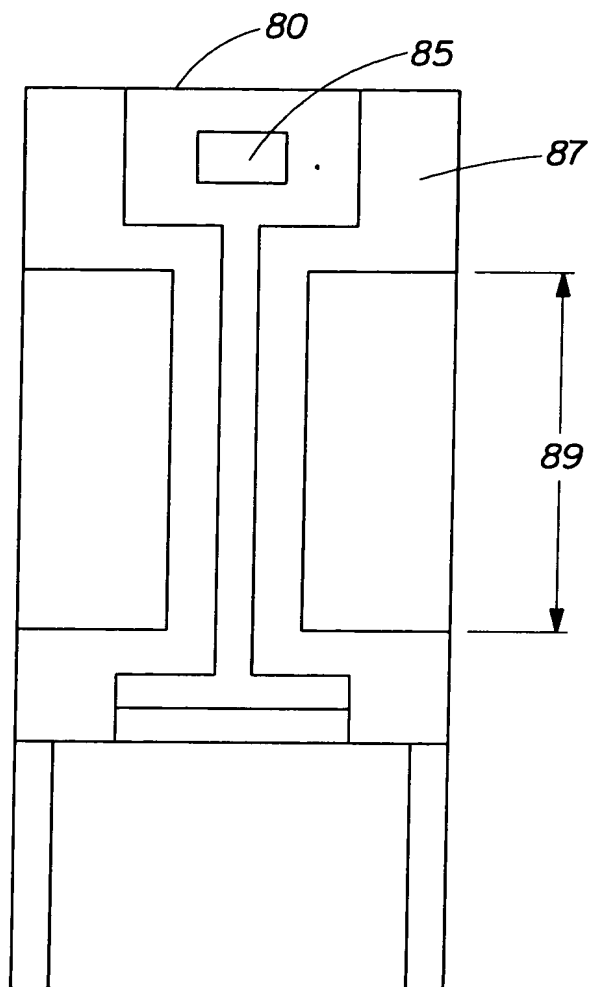


Fig. 24



11/24

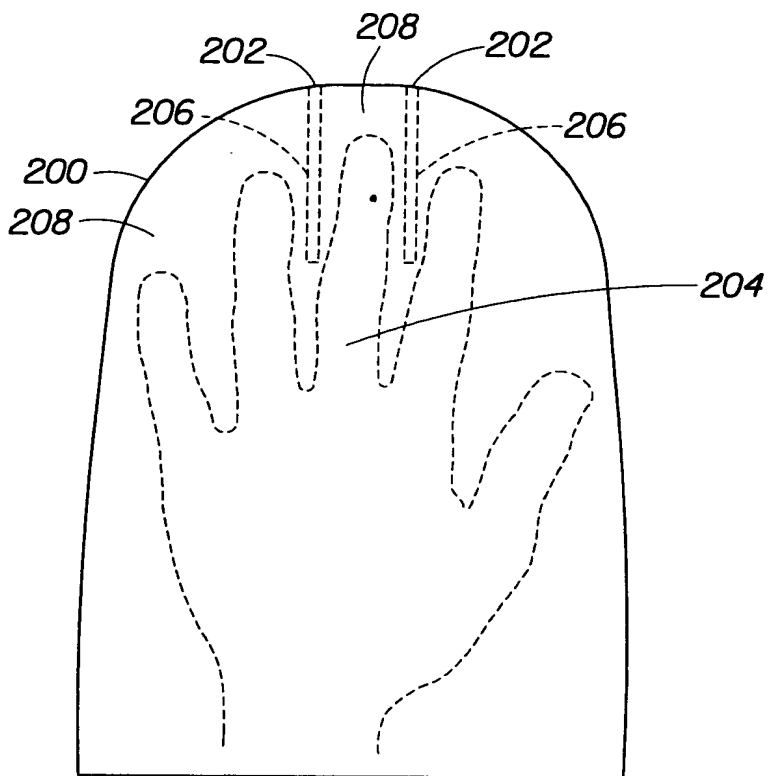


Fig. 25



12/24

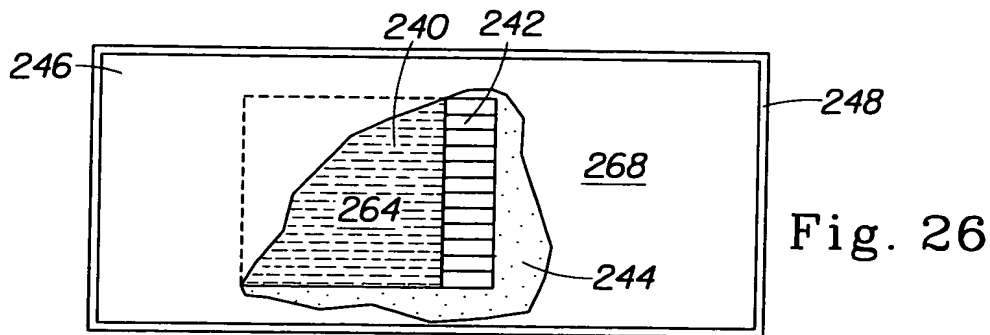


Fig. 26

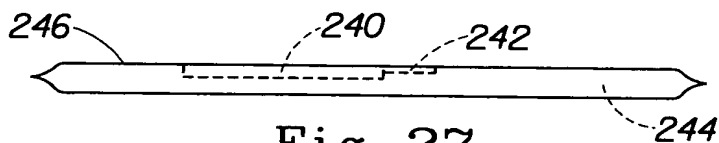


Fig. 27

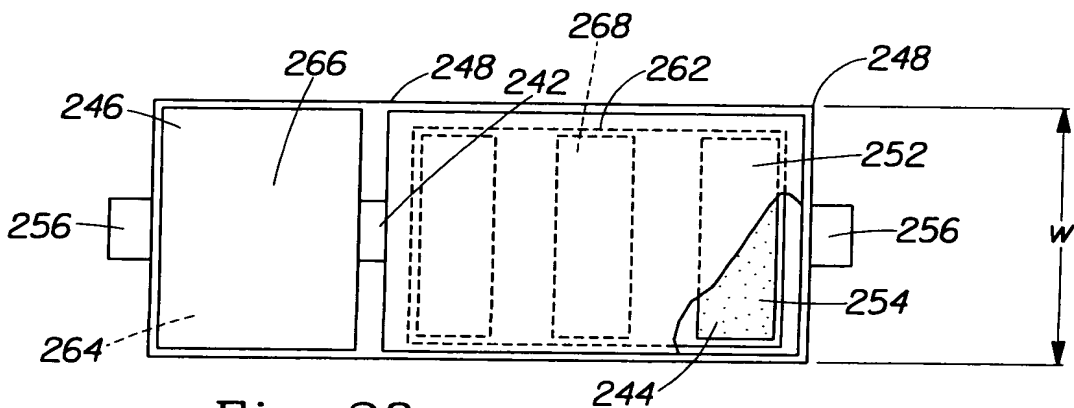


Fig. 28


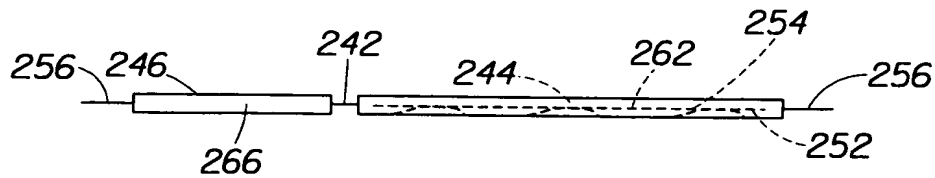


Fig. 29



13/24

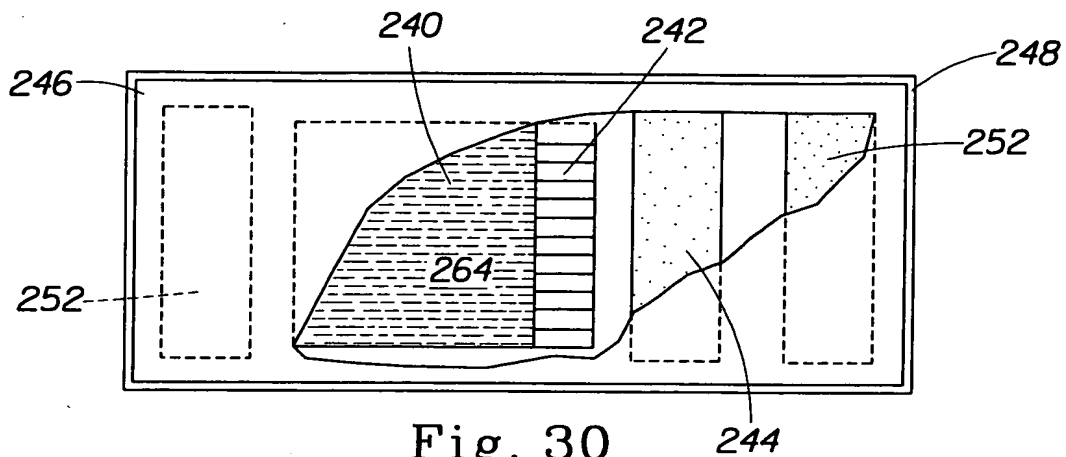


Fig. 30

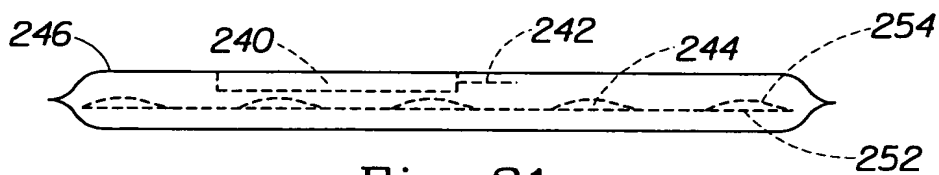


Fig. 31

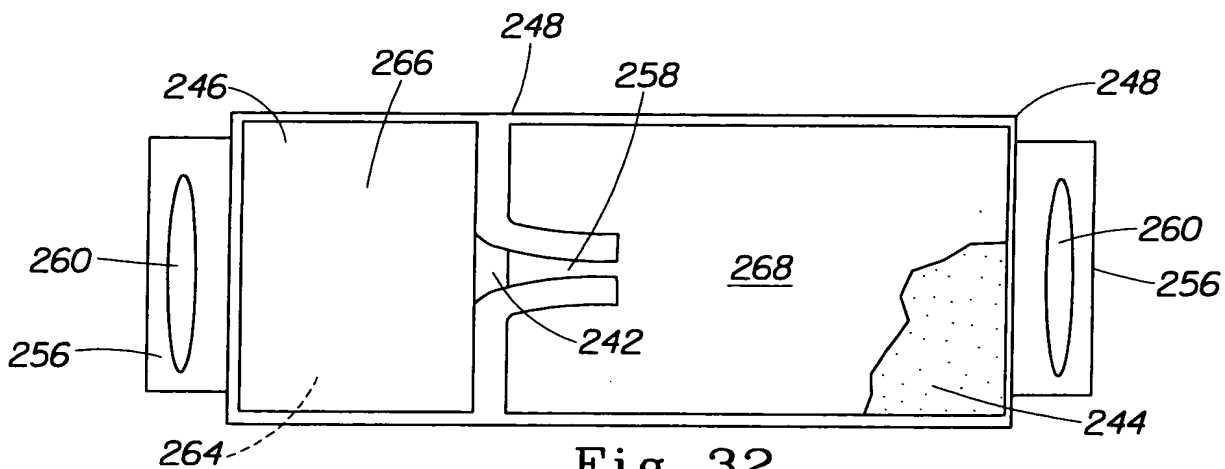


Fig. 32

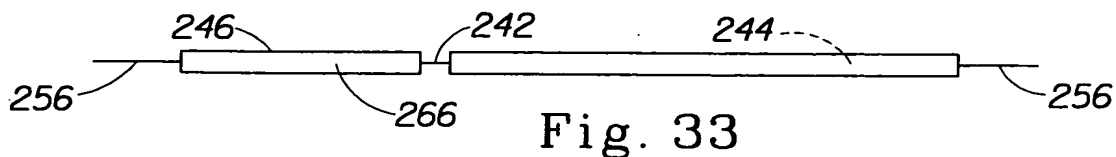


Fig. 33



14/24

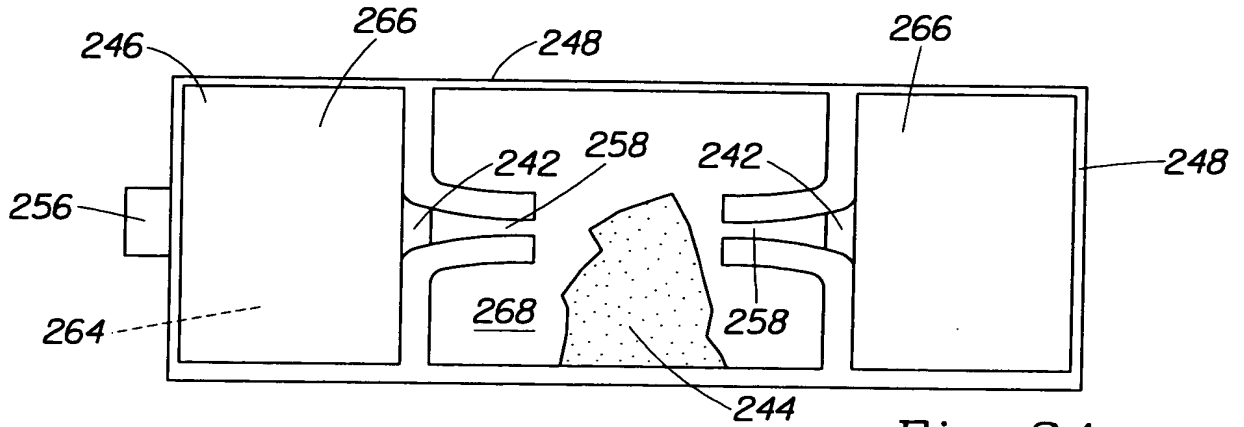


Fig. 34

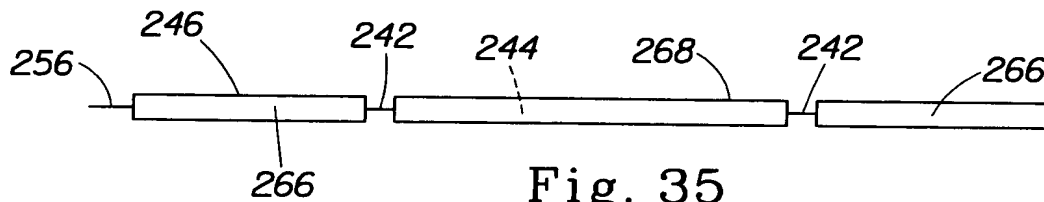


Fig. 35

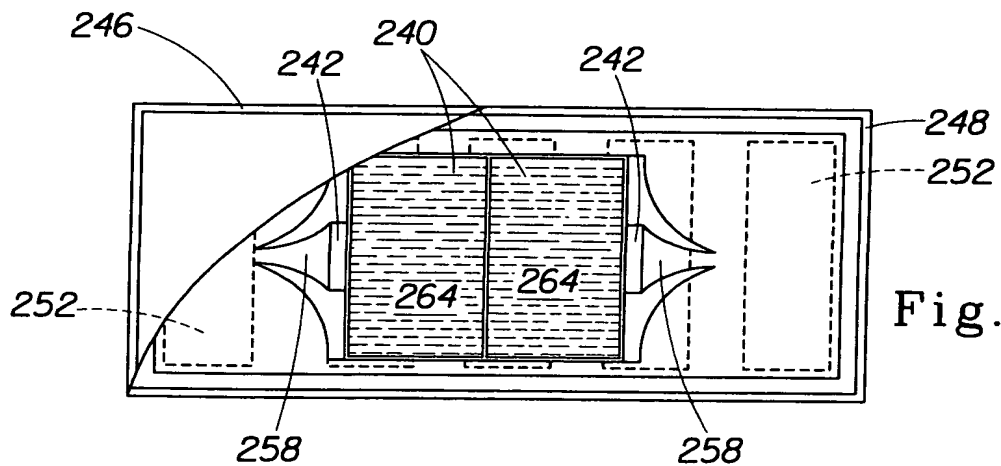


Fig. 36





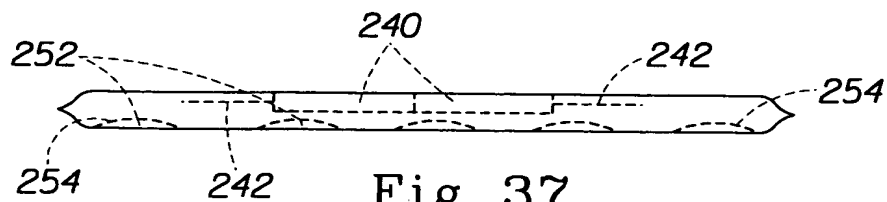


Fig. 37

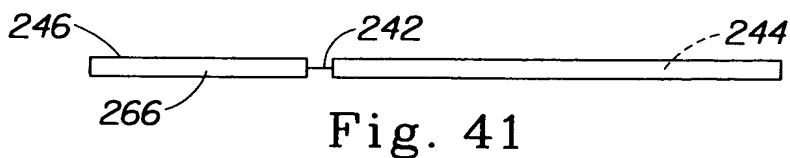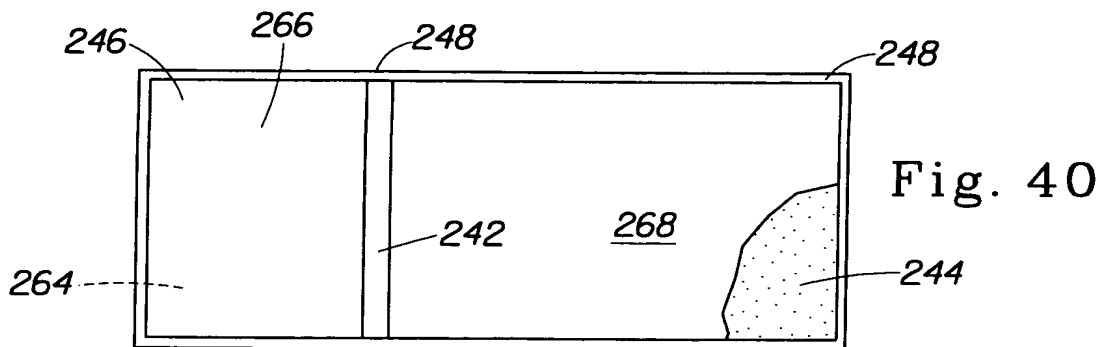

15/24

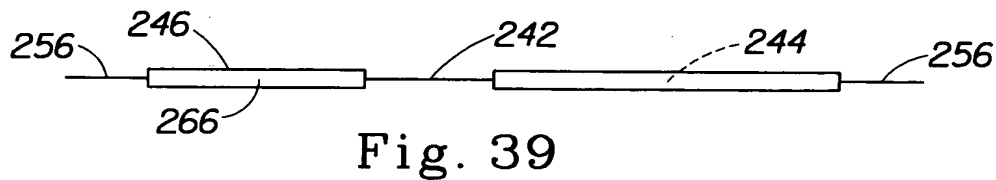

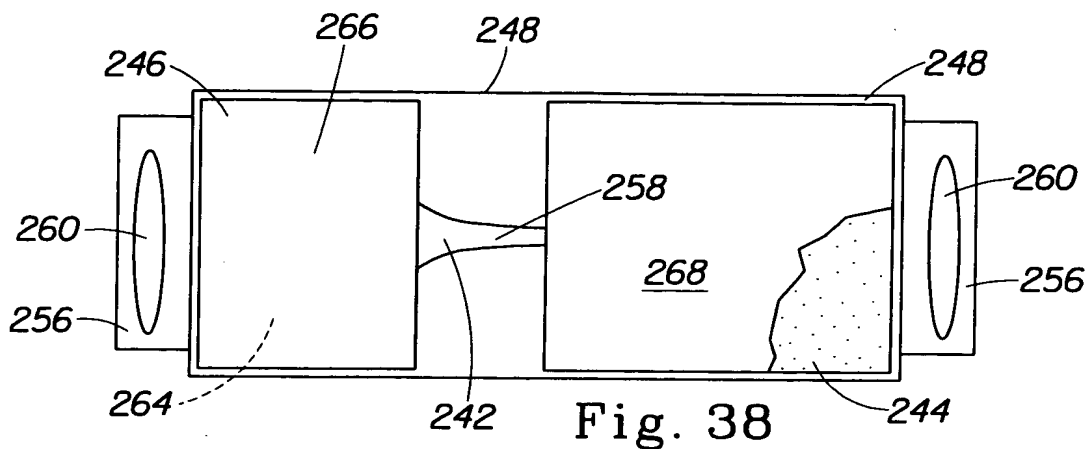

16/24

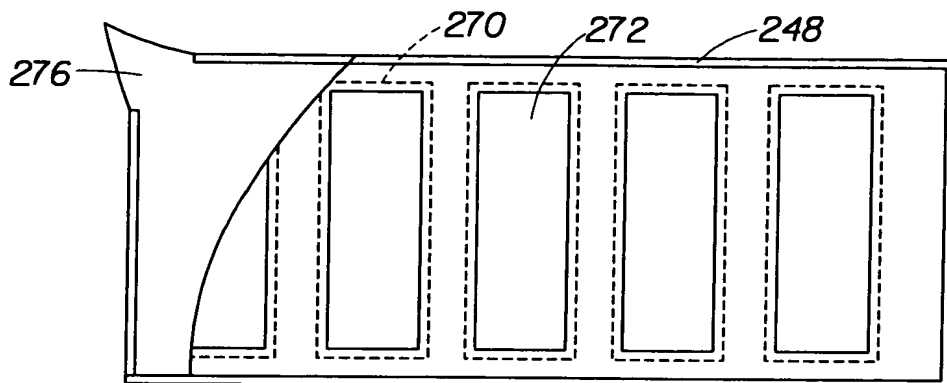


Fig. 42



Fig. 43


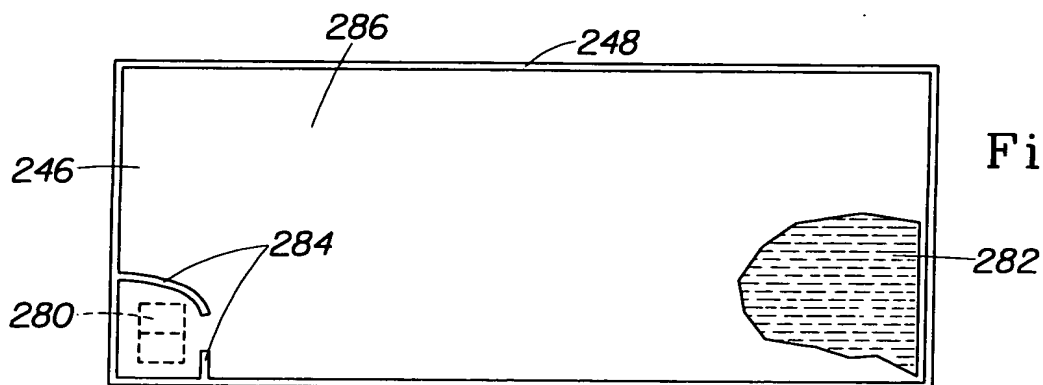


Fig. 44



Fig. 45



17/24

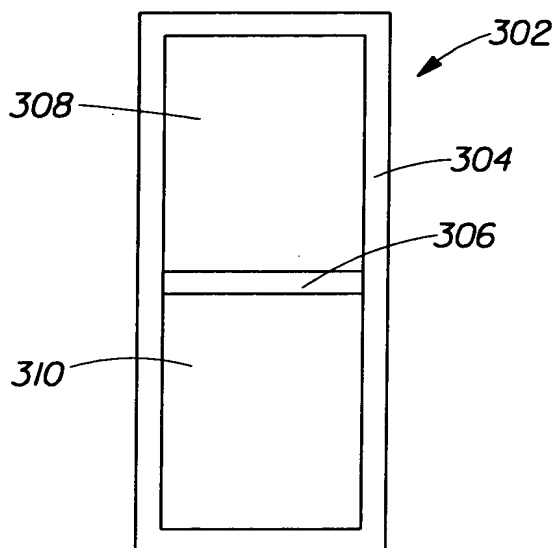


Fig. 46





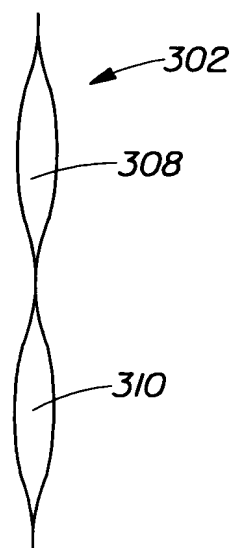


Fig. 47

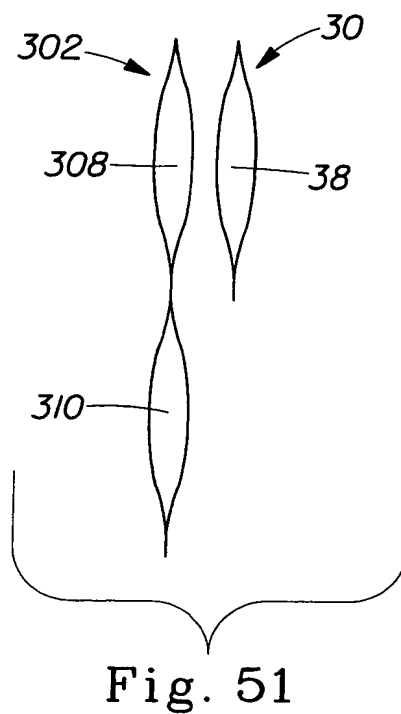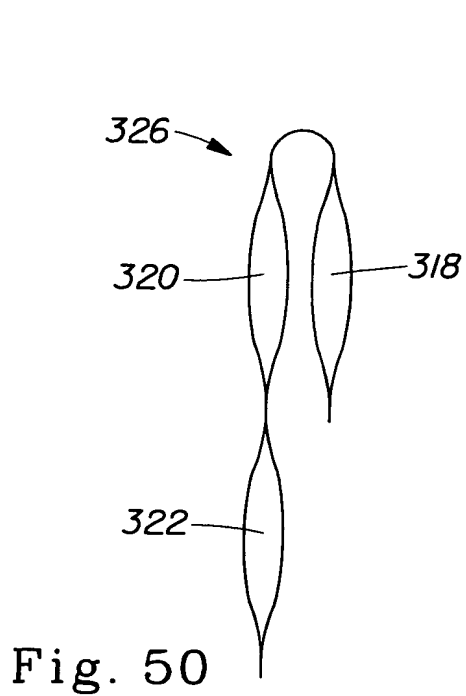

18/24

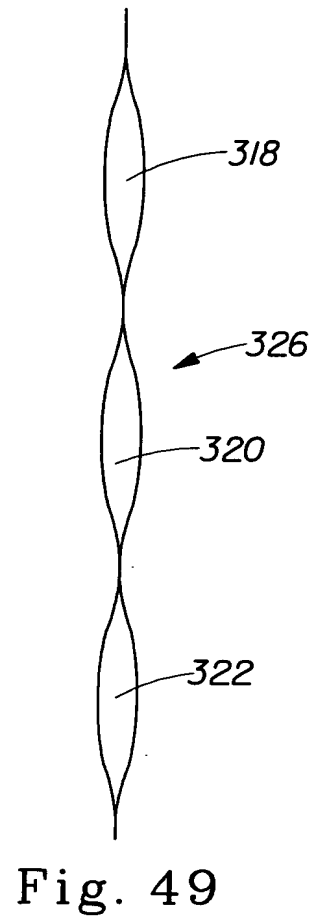

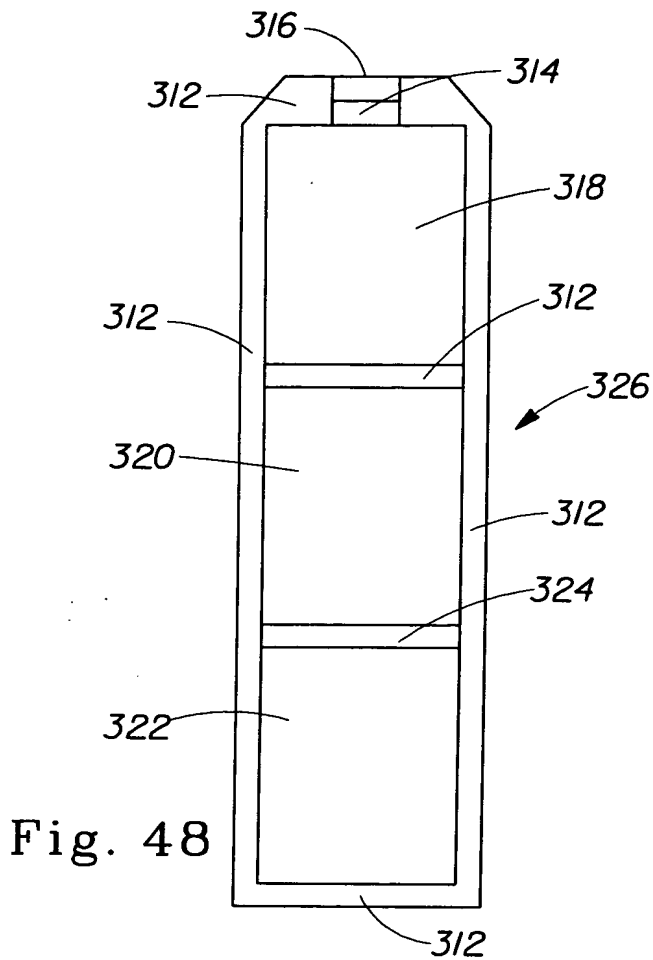

19/24

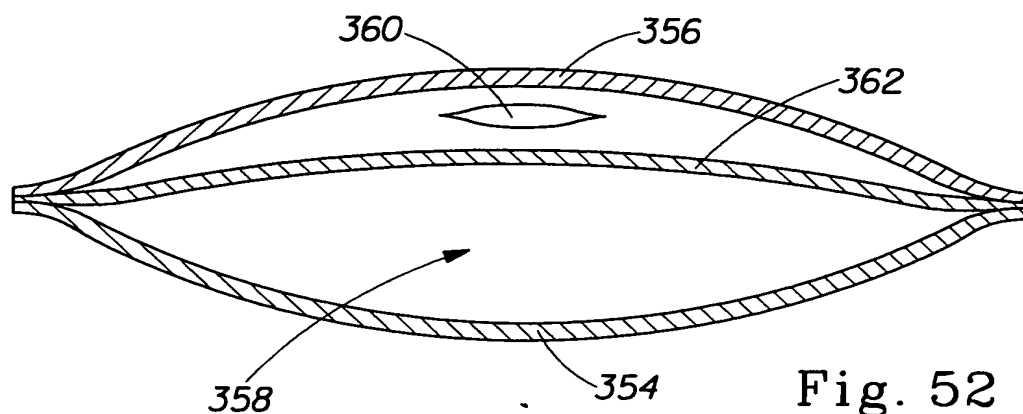


Fig. 52

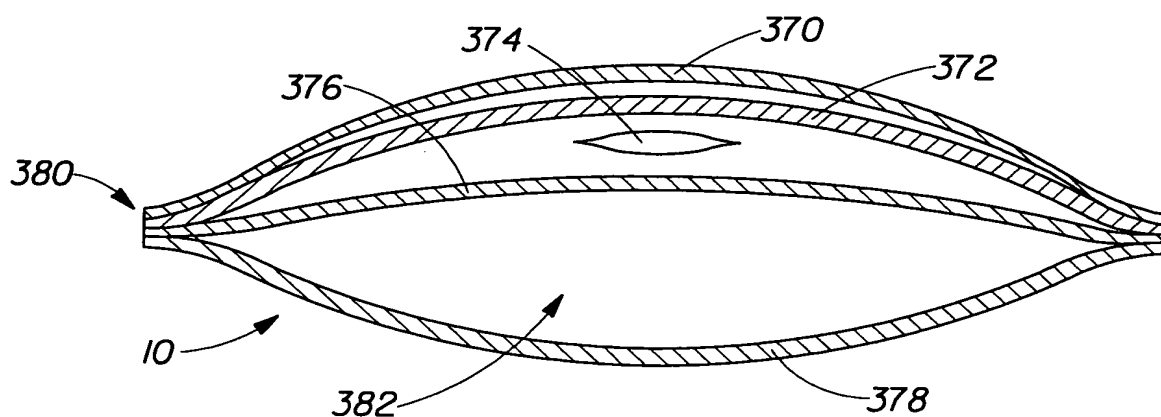


Fig. 53



20/24

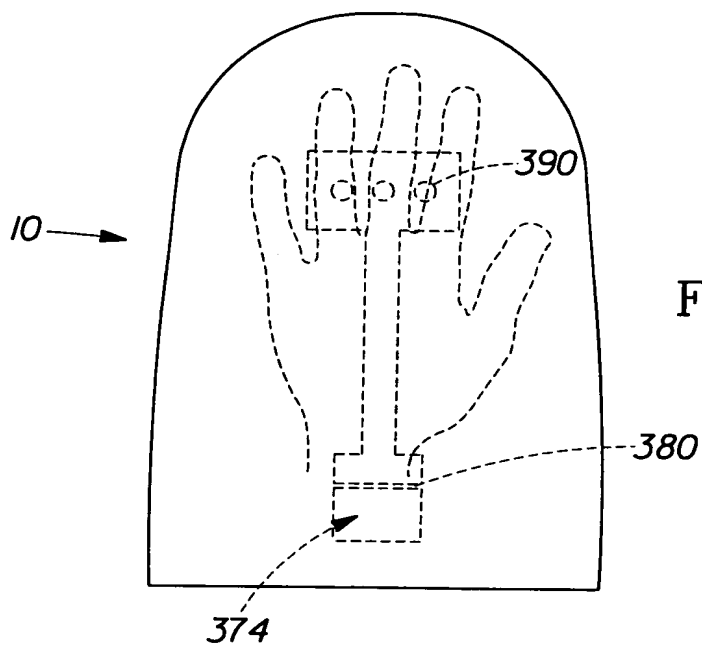


Fig. 54

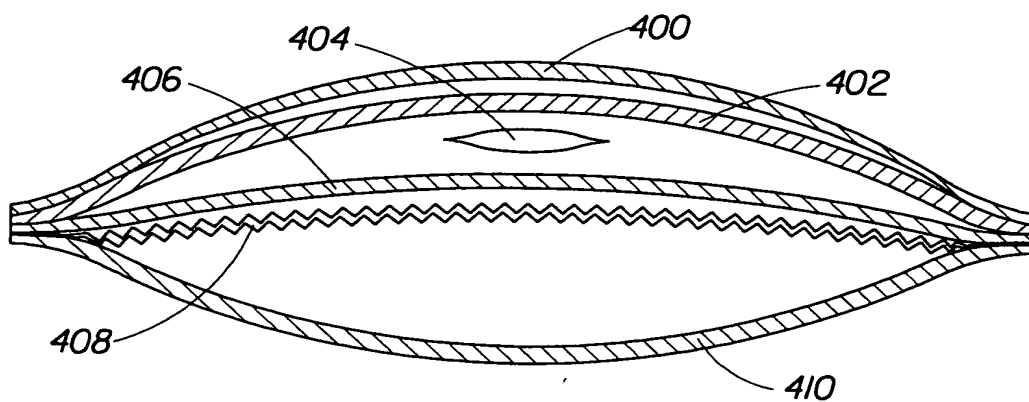


Fig. 55



21/24

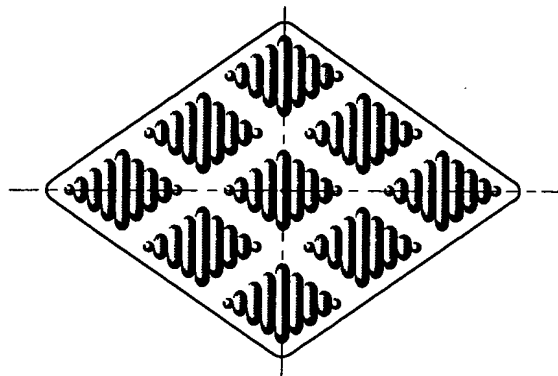


Fig. 56

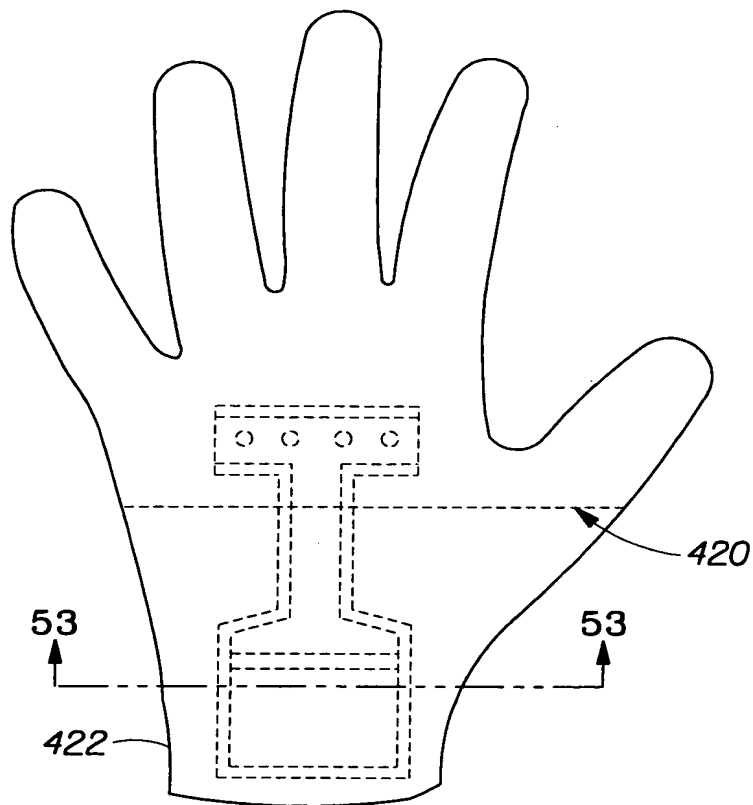


Fig. 57

Gruenbacher, et al. S.N. 10/089,351  
A Semi-Enclosed Applicator Having a Temperature Changing  
Element



23/24


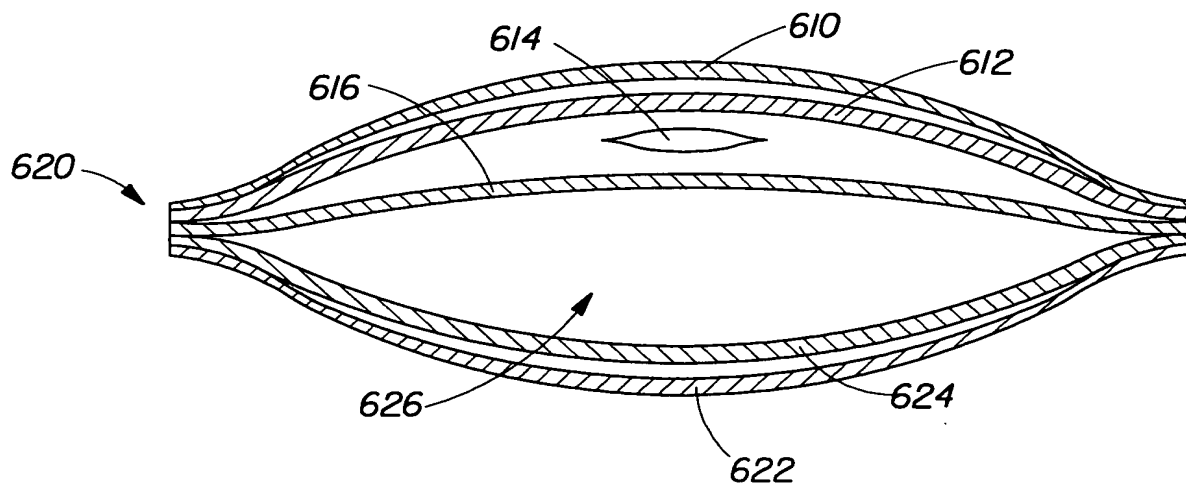


Fig. 61

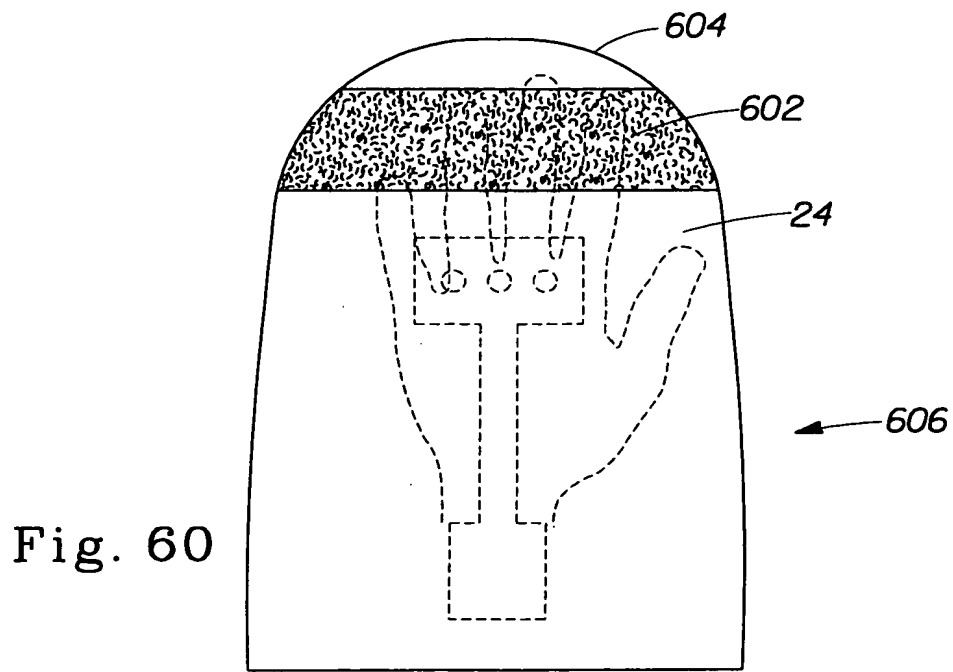

24/24

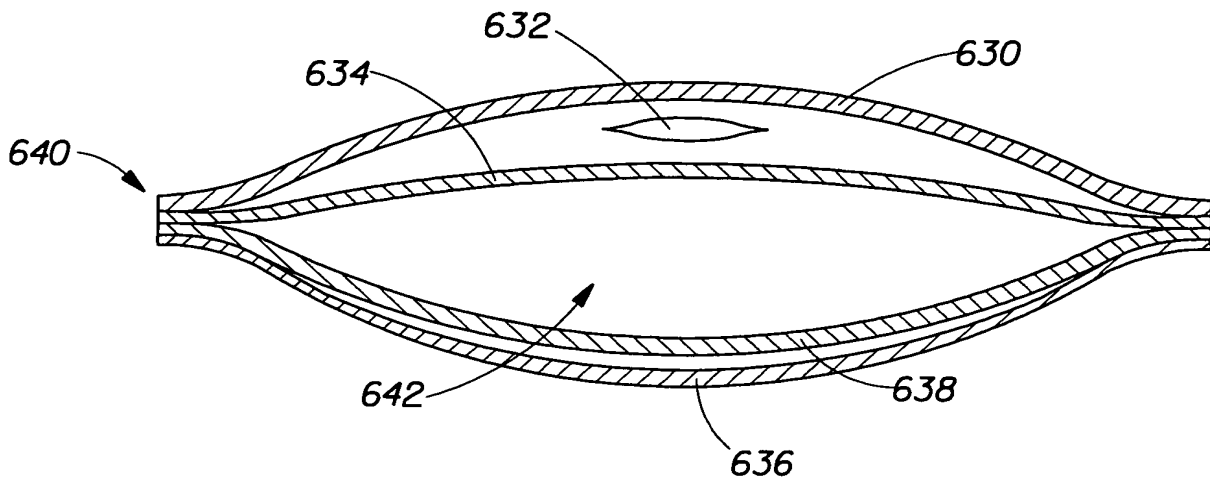


Fig. 62